

CB400Q

5G LTE Multiband Combination Antenna, 4Leads



Electrical Specifications


Cable Leads Number	Cable 1 - 4	
Frequency Range(MHz)	617-960	1710-3800
Peak Gain (dBi)	2	3
Isolation (dB)	>8	>14
Polarization	Vertical	Vertical
VSWR	≤4	≤3.0
Average Power, Maximum (W)	10	
Impedance (Ω)	50	

Mechanical Specifications

Dimensions (mm)	Φ120×35
Net Weight (kg)	0.5
Radome Material / Color	UV Stabilized ABS / Black or White
Cable Type / Length (M)	RG58 / 1
Connector Type	SMA Male (4×)

Environmental Specifications

Application	Indoor / Outdoor
Operating Temperature (°C)	-40 to +70 (-40 to 158°F)
Water Ingress Rating	IP67

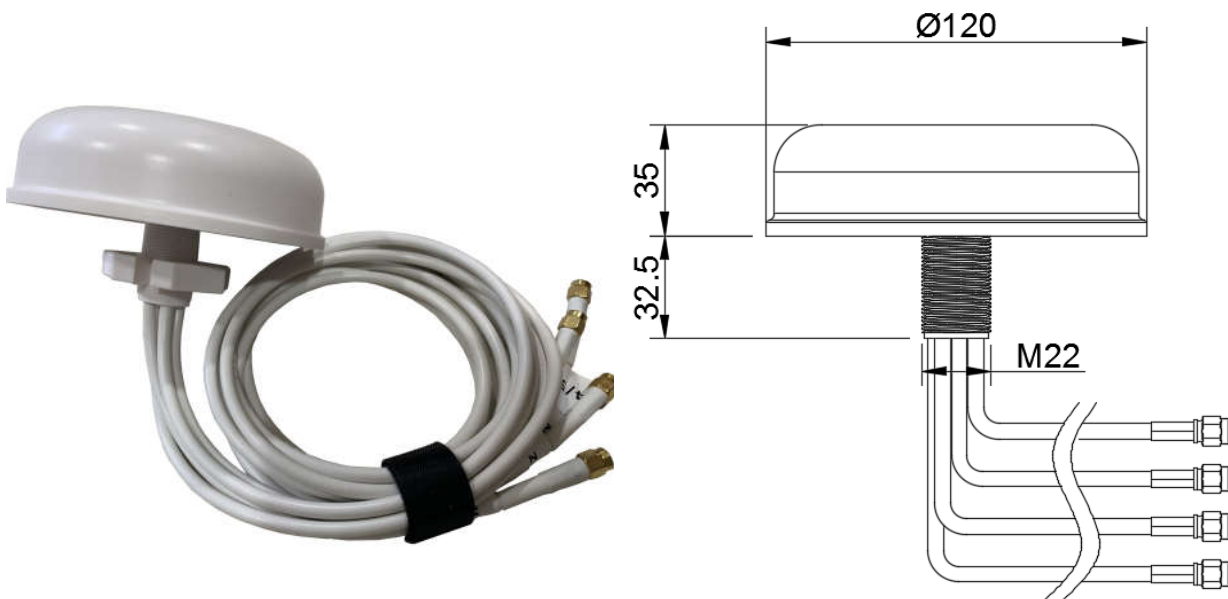

Decipro Technologies Ltd., B2A Building, New Light Industrial Base, Luocun S Ave. Nanhai, Foshan, Guangdong, China 528226
Tel +86(0)757 8355 4087 Email sales@deciprotech.com Website www.deciprotech.com